


## RCCN 日成NBW型 90度金属软管接头 Conduit Fittings-Elbow

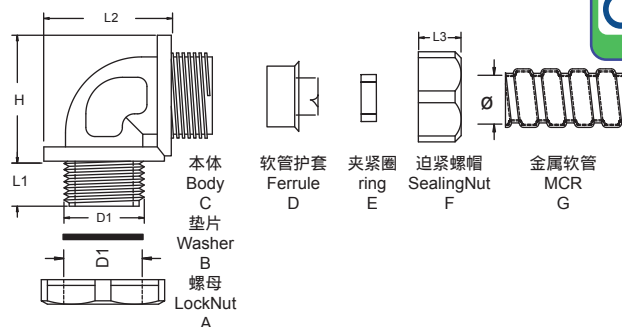

螺纹规格:管螺纹G/PF牙,公制螺纹Metric,德制螺纹 PG  
产品材质:A.C.F部位均采用优质钢制成.B.E采用丁腈橡胶(NBR)制成.D为铁皮压铸制成.  
产品认证:欧洲CE,欧洲环保RoHS

颜色种类:金属色(银白色)

工作温度:-40°C至100°C,瞬间可耐热达120°C.

产品特性:1.接合后和箱体成90度,加厚型锌合金镀锌或硬铬,外型美观,结构紧密,强度高.

2.除以下标准规格外,可另按需求任意变动大小及螺纹标准.

Thread:G,Metric, PG

Material:A.C.F are made from zinc metal.B.E are made of NBR.D is made of iron sheet .

Certificates:CE RoHS

Color:Argentine(silver)

Protect class:IP6

Operate T.: -40°C to 100°C,120°C in a short time.

Features: 1.90°between items and box after joining,thickness added zinc coated metal

2.special thread can be produced

单位/Unit:mm

型号 Item No.	螺纹标准 Thread	配套日成金属软管 RCCN MCR suitable RCCN metal flexible conduit MCR			螺纹外径 Thread O.D. D1	螺纹长度 Thread Length L1	接合长度 Thread Length L2+L3	包装 Packing pcs
		对应型号 Corresponding item no	公制 Metric ø	英制 British				
<b>管螺纹 NBG-G</b>								
NBW-04G	G3/8"	MCR-04	13	3/8"	16.66	8	50	30
NBW-05G	G1/2"	MCR-05	16	1/2"	20.95	11	54	30
NBW-06G	G3/4"	MCR-06	20	3/4"	26.44	14	60	30
NBW-08G	G1"	MCR-08	25	1"	33.25	15	70	20
NBW-10G	G1 1/4"	MCR-10	32	1 1/4"	42.91	15	90	20
NBW-12G	G1 1/2"	MCR-12	38	1 1/2"	47.8	16	100	20
NBW-16G	G2"	MCR-16	51	2"	59.6	18	120	10
NBW-20G	G2 1/2"	MCR-20	64	2 1/2"	75.18	22	160	10
NBW-24G	G3"	MCR-24	80	3"	87.88	22	190	5
NBW-32G	G4"	MCR-32	100	4"	113	24	220	5
<b>公制螺纹 NBG-M</b>								
NBW-04M	M16*1.5	MCR-04	13	3/8"	16	8	50	30
NBW-05M	M20*1.5	MCR-05	16	1/2"	20	11	54	30
NBW-06M	M25*1.5	MCR-06	20	3/4"	25	14	60	30
NBW-08M	M32*1.5	MCR-08	25	1"	32	15	70	20
NBW-10M	M40*1.5	MCR-10	32	1 1/4"	40	15	90	20
NBW-12M	M50*1.5	MCR-12	38	1 1/2"	50	16	100	20
NBW-16M	M63*1.5	MCR-16	51	2"	63	18	120	10
<b>德制螺纹 NBG-PG</b>								
NBW-04P	PG11	MCR-04	13	3/8"	18.6	8	50	30
NBW-05P	PG13.5	MCR-05	16	1/2"	20.4	11	54	30
NBW-06P	PG21	MCR-06	20	3/4"	28.3	14	60	30
NBW-08P	PG29	MCR-08	25	1"	37.0	15	70	20
NBW-10P	PG29	MCR-10	32	1 1/4"	37.0	15	90	20
NBW-12P	PG36	MCR-12	38	1 1/2"	47.0	16	100	20
NBW-16P	PG48	MCR-16	51	2"	59.3	18	120	10

